

Very compact control unit with many connection options (max. 4 drives). Power supplied from external source (DC).

- Control unit: relay-free control, relay control, microprocessor control with customised programming, fault signalling
- Connection options:  
Connections for drives: 1-4  
Connections for operating elements: 1



Note: Responsibility for OKIN products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which OKIN products are fitted. We accept no liability for the correctness.

DewertOkin GmbH • Weststraße 1 • 32278 Kirchlengern  
Phone: +49 (0)52 23 / 9 79 -0 • Fax: +49 (0)52 23 / 7 51 82 • Email: [info@okin.de](mailto:info@okin.de) • Internet: <http://www.okin.de>

## Standard configurations

### Performance data

Duty cycle	2/18 min. or 10 %, max, 5 switching cycles per minute
Control unit	relay-free control, relay control, microprocessor control with customised programming
Output voltage	24 V DC

### Components


Housing colour	black RAL 9005, light grey RAL 7035
Connection cable	black, straight, 100 mm, PVC
Extension line	available separately, 2500 mm, straight, black, PVC
Transformer / Transformer type	external DC power supply

### Further data


Connectivity <sup>1</sup>	connections for drives: 1-4 connections for operating elements: 1
Protection type	IP20
Protection class	III
Relative humidity	30% - 75%
Ambient temperature	+10°C - +40°C
Power supply	external DC power supply
Assembly options	fastening drill-holes

<sup>1</sup> (example, depending on control unit type)

Side view

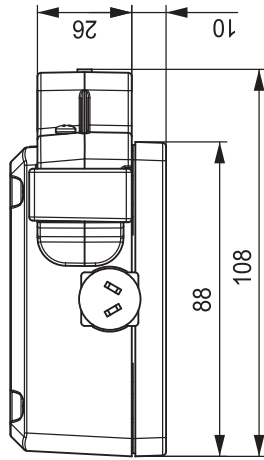

Front view

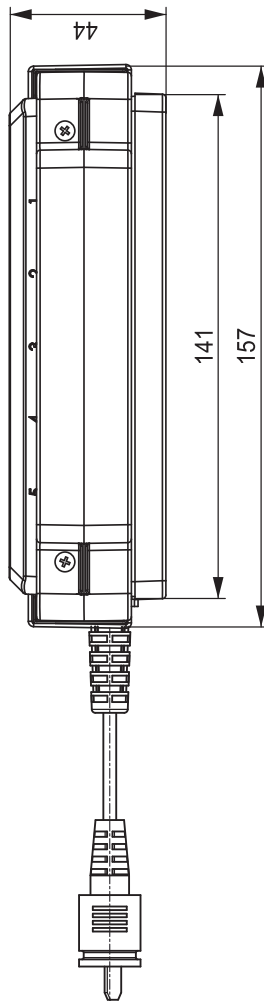

Top

